

# Easidew Transmitters

## Industrial Dew-Point Transmitters

Simple to install and maintain, the Easidew transmitter series measures dew point and moisture content and is available with a range of process connections and electrical connectors. The Easidew I.S. transmitter has global intrinsically safe certifications and all Easidew models are available with service exchange program which reduces the cost of maintenance.



### Highlights

- Measurement ranges -110 °Cdp up to +20 °Cdp (-166 °Fdp up to +68 °Fdp)
- Dew point or ppm<sub>v</sub> moisture content output
- 2-wire loop power connection
- Accuracy ±2 °Cdp (±3.6 °Fdp)
- Traceable calibration certificate
- Easidew I.S. IECEx, cQPSus, ATEX and UKCA approvals
- Low cost of ownership and easy maintenance with sensor exchange program
- 316 Stainless steel sensor and sample blocks
- 5/8 " UNF, 3/4 " UNF, G 1/2 " process connections
- KF40 Glove Box flange
- MiniDIN 43650, M12 electrical connectors
- Oxygen Service cleaned

### Applications

- Compressed air Class 1 to Class 6 dryers
- Breathing air
- Hydrogen coolant
- Inert and bulk gases
- Glove boxes
- Welding gases
- Hazardous areas
- Oxygen purity

# Easidew Transmitters

## Industrial Dew-Point Transmitters

### The Universal Moisture Transmitter

The Easidew transmitter has a wide measurement range from -110 °C to +20 °C (-166 °F to +68 °F) dew point and one stocked product can be used across all class 1 to class 6 industrial dryer applications.

The Easidew family of industrial transmitters incorporates the latest Michell ceramic metal-oxide moisture technology providing stable, reliable and repeatable moisture measurements for all dew-point applications.

### Ease of Installation

Flexible product design ensures the unit can be quickly and economically installed.

- Mini DIN 43650 form C or M12 5 pin electrical connectors
- 5/8 " UNF, 3/4 " UNF, G1/2 " BSP process connections
- KF40 Glove Box type flange process connection
- 316 stainless steel transmitter sample blocks
- On-site configuration and diagnostic communication tool

### Service Exchange/Recalibration Program

Michell offers 2 services for customers who want minimum downtime and sensor traceability, while maintaining the reliability of their system:

- Sensor Exchange – Customers place an order for a guaranteed, reconditioned sensor. When this arrives, they exchange it for the installed sensor which is returned to Michell, resulting in zero process downtime.
- Recalibration – Customers return their installed sensor to Michell, where they are inspected, checked and re-calibrated before being returned. This provides on-going sensor traceability for the process.

### Global Certifications

The Easidew series has a broad range of certifications to ensure a single stocked unit can be used in any global application.

- Easidew I.S. – ATEX, UKCA & IECEx
- Easidew I.S. – cQPSus (US and Canada)
- Easidew I.S. – EX-TR CU
- Easidew – UL approval
- All Easidews – Canadian pressure vessel approved (CRN)

Michell has a large team of experienced field and factory based application engineers who are available to assist with any dew point sensor application.

### Safety and Integrity

The mechanical design considers the health and safety quality requirements of the end user, offering an ultra-high process pressure barrier, along with meticulous levels of product traceability and quality.

- High-performance 525 bar process media barrier
- Optional gas wetted parts BS EN 10204 3.1 material certified
- Optional cleaning for enriched oxygen service
- 13-point calibration certificate

### Measurement Performance

The transmitter uses Michell's market-leading ceramic metal-oxide moisture sensor technology coupled with the latest-generation sophisticated microcontroller electronics to provide accurate and stable measurement across the transmitter's product life.

- Accuracy  $\pm 2$  °Cdp ( $\pm 3.6$  °Fdp)
- Fast response to moisture changes

### Flexibility of Ownership

The Easidew transmitter has a RS485 communication system, which gives customers the opportunity to re-range and re-scale with a communication kit for a wide variety of moisture measurements.

- Re-ranging 4 mA to 20 mA within the -110 °Cdp to +20 °Cdp (-166 °Fdp to +68 °Fdp) range
- Moisture scaling – dew point, ppm<sub>v</sub>

### Speed of Supply

The transmitter is manufactured within Michell's world-leading high-volume moisture transmitter manufacturing center in the United Kingdom, which ensures reliability and repeatability of delivery and field supported by a network of Michell's global service centres.

- Calibration manufacturing system is traceable to globally recognized NPL and NIST ISO 17025 standards

### Installation Accessories

Transmitters are available with a range of practical accessories.

- 5/8 " UNF, 3/4 " UNF, G1/2 " BSP Sample blocks
- Compact simple sample systems
- Process connection adaptors

### Customization

If your application requires a customized sensor, we have specialized design and manufacturing capability to cover your requirements.




## Technical Specifications

Product	Easidew, Easidew M12 and Easidew 34 Transmitter	Easidew I.S. Transmitter
<b>Performance Specifications</b>		
Measurement Range	-110 °C to +20 °C (-166 °F to +68 °F) dew point; -100 °C to +20 °C (-148 °F to +68 °F) dew point; non standard ranges available on request	
Accuracy	±2 °C (±3.6 °F) dew point*	
Response Time	5 mins to T95 (dry to wet)	
Repeatability	0.5 °C (0.9 °F) dew point	
Calibration	Traceable 13-point calibration certificate	
<b>Electrical Specifications</b>		
Output Signal	4 mA to 20 mA (2-wire connection, current source); User configurable over range Easidew M12: Modbus RTU over RS485	
Output	Dew point or moisture content	
Analog Output Scaled Range	Dew point: -110 °C up to +20 °C (-166 °F up to +68 °F); Moisture content in gas: 0 ppm <sub>v</sub> up to 3000 ppm <sub>v</sub> ;	
Supply Voltage	12 V DC to 28 V DC	
Load Resistance	Max 250 Ω @ 14 V (500 Ω @ 24 V)	
Current Consumption	23 mA max, depending on output signal	
Compliances	CE & UKCA	
UL61010-1 & CAN/CSA C22.2 No. 61010-1		
<b>Operating Specifications</b>		
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)	
Compensated Temperature Range	-20 °C to +50 °C (-4 °F to +122 °F)	
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)	
Operating Pressure	52.5 MPa (525 barg/7614 psig) maximum	
Flow Rate	1 NI/min to 5 NI/min mounted in standard sampling block; 0 m/s to 10 m/s direct insertion	
<b>Mechanical Specifications</b>		
Ingress Protection	IP66 in accordance with standard BS EN 60529:1992; NEMA 4 protection in accordance with standard NEMA 250-2003 Easidew M12: IP65	
Intrinsically Safe Area Certificates	ATEX/UKCA: II 1 G Ex ia IIC T4 Ga (-20 °C to +70 °C) IECEX: EX ia IIC T4 Ga (-20 °C to +70 °C) TR CU @ 0Ex ia IIC T4 Ga (-20 °C to +70 °C) cQPSus: Class I, Division 1, Groups A, B, C & D, T4 Class I, Zone 0, AEx ia IIC T4 Gb, Ex ia IIC T4 Gb Tamb +70 °C	
Oxygen Service	Optional: Cleaned for enriched oxygen service	
Housing Material	316 stainless steel	
Dimensions	MiniDIN 43650 form C L=132 mm x ø45 mm (with connector cable) Easidew M12: M12 5 pin L = 155 mm x ø45 mm (with connector cable)	
Filter (Sensor Protection)	Standard: HDPE <10 µm Optional: 316 stainless steel sintered guard <80 µm	
Process Connection	Easidew: 5/8 " - 18 UNF Easidew 34: 3/4 " - 16 UNF Easidew M12: 5/8 " - 18 UNF, 3/4 " - 16 UNF, G1/2 " BSP	5/8 " - 18 UNF, 3/4 " - 16 UNF, G1/2 " BSP
KF40 Flange Accessories	Flange for 5/8 " 18 UNF & 3/4 " 16 UNF process connections	
Weight	150 g (5.29 oz)	
Electrical Connections	Easidew: MiniDIN 43650 form C Easidew M12: M12 5 Pin (A coded)	MiniDin 43650 form C
Mating Electrical Connectors	Mating connector supplied as standard Easidew M12: optional 0.8, 2, 5 metre (2.62, 6.56, 16.4 foot) M12 A coded connector/cable available	
Diagnostic Conditions (factory programmed)	Sensor fault: 23 mA Under-range dew point: 4 mA Over-range dew point: 20 mA	
Approved Galvanic Isolators	KFD2-CR-EX1.20200 KFD2-CR-EX1.30200 KFD0-CS-EX1.50P KFD0-CS-EX2.50P KFD2-STC4-EX1.H MTL5041 MTL5040	





NOTES \* Over Compensated Temperature Range

## Product Dimensions

### Easidew & Easidew I.S.

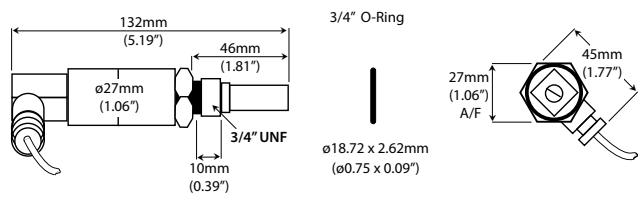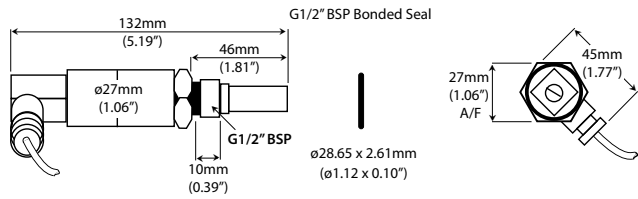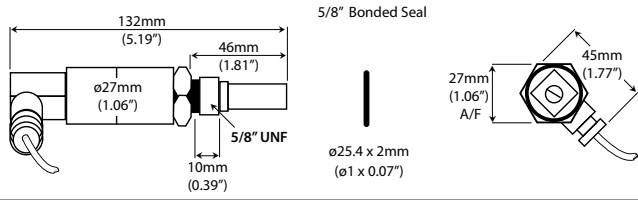

### Easidew M12

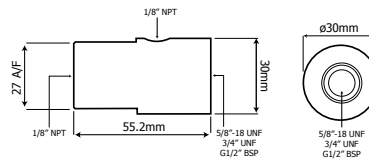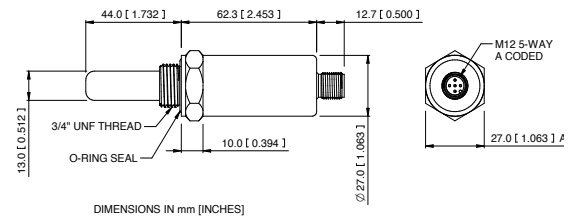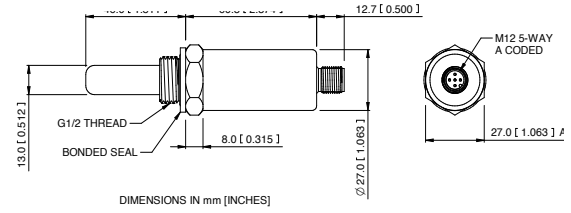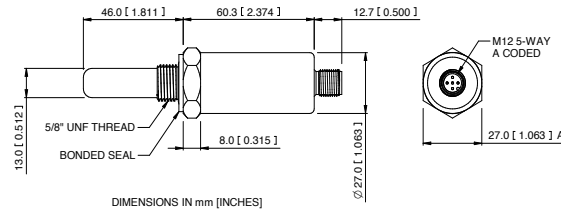

Optional Sample Block  
(see accessories and spare parts)

## Related Process Products



**Easidew Online**  
Dew-Point Hygrometer



**Optidew 501**  
Chilled Mirror Hygrometer



**Easidew PRO X.P.**  
Explosion Proof Moisture Transmitter



**Senz-Tx**  
Oxygen Transmitter



**MDM50**  
Portable Hygrometer



**MDM300 I.S.**  
Dew-Point Hygrometer



**ES20**  
Compact Sampling System



**S8000 RS**  
High Precision Chilled Mirror Hygrometer

Michell Instruments adopts a continuous development programme which sometimes necessitates specification changes without notice.  
Issue no: Easidew Transmitters\_97554\_V4\_EN\_0226

